


KIT CONTENTS

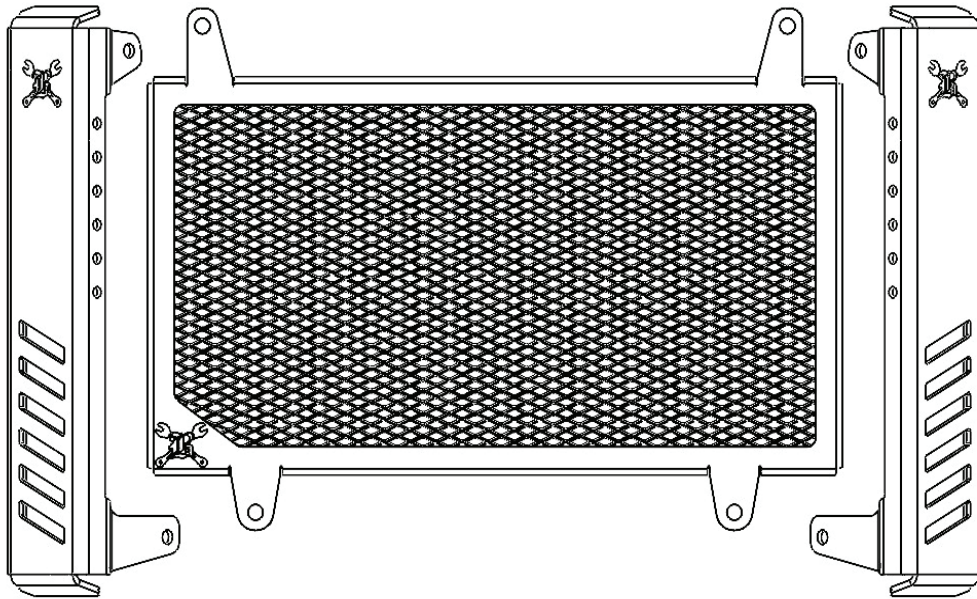

QTY	DESCRIPTION
1	CENTER GUARD
1	LEFT GUARD
1	RIGHT GUARD

LIMITED GUARANTEE

We continually inspect and try to improve our products. All parts have been inspected prior to packaging, and our guarantee is limited to replacement of defective parts. This guarantee is in lieu of all guarantees or warranties implied or expressed. Because we can not control the application of our products, the buyer assumes risks for any and all damage caused by themselves or any third party, by virtue of failure of these parts. We make no warranty as to products distributed by us, expressed or implied, including without limitation, any warranties or merchant ability and fitness for particular purpose. We will, however, pass on all warranties made by the manufacturer, who has sole responsibility for performing such warranties. The manufacturer shall solely be responsible for any damage to person or property arising from design, manufacturing and testing of all products, and we accept no liability for such damages. We shall not be liable for indirect or consequential damages.

INSTALLATION INSTRUCTIONS

RADIATOR GUARD - HONDA REBEL

WARNINGS & ALERTS:

- READ AND FOLLOW ALL INSTRUCTIONS TO PROPERLY INSTALL THIS KIT.
- IMPROPER INSTALLATION CAN CAUSE UNSATISFACTORY AND/OR UNSAFE OPERATION.
- READ ALL THE INSTRUCTIONS CAREFULLY BEFORE INSTALLING THIS KIT ON YOUR MOTORCYCLE. USE YOUR HONDA SERVICE MANUAL AS A REFERENCE WHILE INSTALLING THIS KIT.

INSTALLATION

1. Remove the bolt and wire retaining bracket located at the top center of guard (will not be reused)
2. Remove the 4 front facing bolts and the stock radiator guard from radiator. Retain stock bolts for reuse.
3. Place 1x of stock bolts through top mounting hole of Burly radiator guard, then top mounting hole of Burly side cover. Loosely thread bolt into top location on radiator.
4. Repeat on the bottom mount
5. Repeat steps 3-4 on other side.
6. Torque bolts to 70 in-lbs

