BURLY BRAND
MOTORCYCLE ACCESSORIES

INSTALLATION INSTRUCTIONS

REAR BRUISER KIT


HARLEY DAVIDSON TOURING MODELS


WARNINGS & ALERTS:

- READ AND FOLLOW ALL INSTRUCTIONS FOR PROPER INSTALLATION.
- IMPROPER INSTALLATION CAN CAUSE UNSATISFACTORY AND/OR UNSAFE OPERATION.
- READ ALL THE INSTRUCTIONS CAREFULLY BEFORE INSTALLING THIS KIT ON YOUR MOTORCYCLE. USE YOUR SERVICE MANUAL AS A REFERENCE WHILE INSTALLING THIS KIT.



1. Remove seat and saddlebags.
2. Remove saddlebag supports from both sides. Ensure to keep all hardware and rubber exhaust mount as it will be reused.
3. Install new lower tube to front guard using socket head bolt and nut, hand tight only.
4. Loosely install assembly to bike reusing stock hardware for the lower mounts and the supplied 3/8" bolt to the top of the frame below the seat.
5. Install the rubber exhaust mount and bracket to the new crash bar assembly. Loosely remount the muffler to the bracket using existing hardware.
6. Ensure all parts are aligned properly and torque all bolts to specifications below:
   a. Rear Mounting Bolt - Inner: 18 ft-lbs
   b. Rear Mounting Bolt - Outer: 36 ft-lbs
   c. Lower Tube to Front Guard: 7 ft-lbs
   d. Upper and Lower Front Bolts: 36 ft-lbs
   e. Muffler Mounting Bolts: 12 ft-lbs
7. Install the four sliders to the crash bar using hardware as shown below. Torque bolts to 18 ft-lbs while aligning logo in desired orientation.
8. Reinstall saddlebags and seat.
9. Enjoy your new Burly Brand Product!

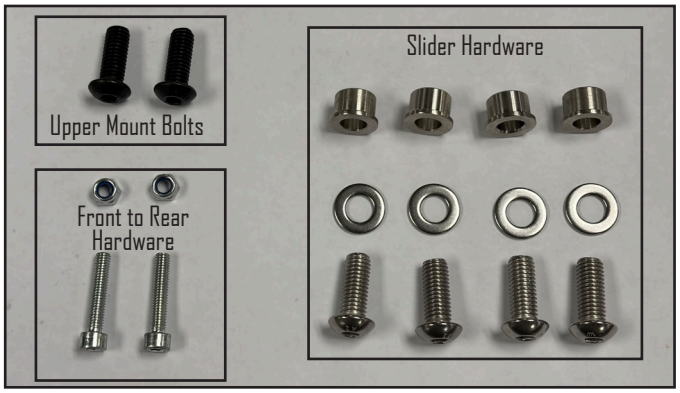

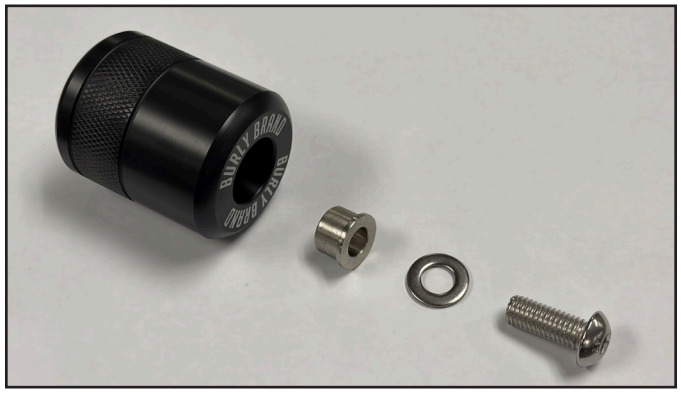

LIMITED GUARANTEE

We continually inspect and try to improve our products. All parts have been inspected prior to packaging, and our guarantee is limited to replacement of defective parts. This guarantee is in lieu of all guarantees or warranties implied or expressed. Because we can not control the application of our products, the buyer assumes risks for any and all damage caused by themselves or any third party, by virtue of failure of these parts. We make no warranty as to products distributed by us, expressed or implied, including without limitation, any warranties or merchant ability and fitness for particular purpose. We will, however, pass on all warranties made by the manufacturer, who has sole responsibility for performing such warranties. The manufacturer shall solely be responsible for any damage to person or property arising from design, manufacturing and testing of all products, and we accept no liability for such damages. We shall not be liable for indirect or consequential damages.