
BURLY BRAND
MOTORCYCLE ACCESSORIES

INSTALLATION INSTRUCTIONS
MX EVOLUTION MINI FLOORBOARDS

WARNINGS & ALERTS:

- READ AND FOLLOW ALL INSTRUCTIONS FOR PROPER INSTALLATION.
- IMPROPER INSTALLATION CAN CAUSE UNSATISFACTORY AND/OR UNSAFE OPERATION.
- READ ALL THE INSTRUCTIONS CAREFULLY BEFORE INSTALLING THIS KIT ON YOUR MOTORCYCLE. USE YOUR SERVICE MANUAL AS A REFERENCE WHILE INSTALLING THIS KIT.

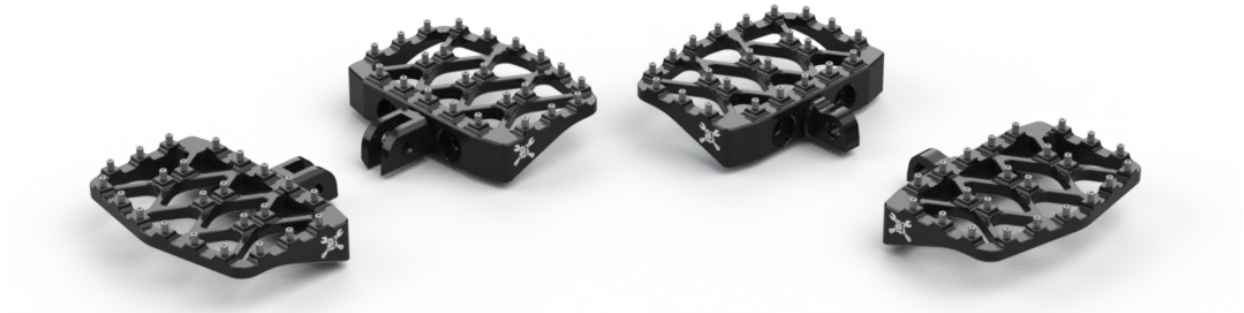

1. Remove OEM foot peg from motorcycle. Keep OEM hardware for reuse.
2. Note: on some models, the foot-peg clevis is longer on one side and requires modification to fit the Burly foot-pegs. To do this, simply remove the clevis from your bike (per a factory authorized service manual), secure it in a vice and grind the long side down 8mm-9mm (.32"-.35") to match the profile of the shorter side (Figure 3) - being careful not to grind too much off (see illustration below). We recommend replating or applying some sort of protective coating to the ground area to prevent possible corrosion. Reinstall the clevis and continue your installation.
3. Install Burly Brand Evolution Mini Floorboard onto clevis reusing all OEM hardware.
4. Remove the center adjustment bolt and rotate floorboard to desired position and rotation. Apply medium strength loctite to the adjustment bolt, reinstall, and torque to 10-12 ft-lbs.
5. Repeat procedure on opposite side floorboard.
6. Enjoy your new Burly Brand Product!

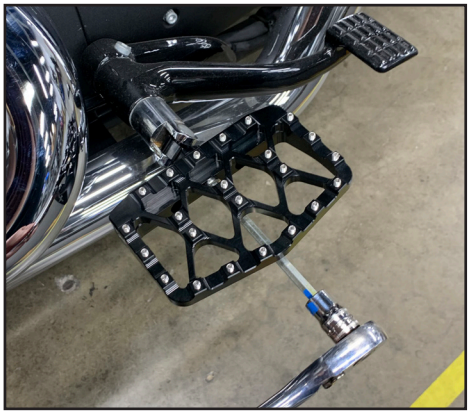


FIGURE 1

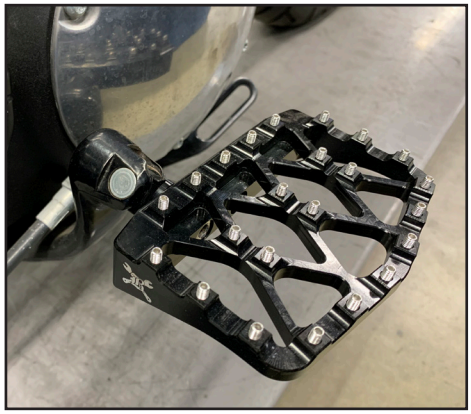


FIGURE 2

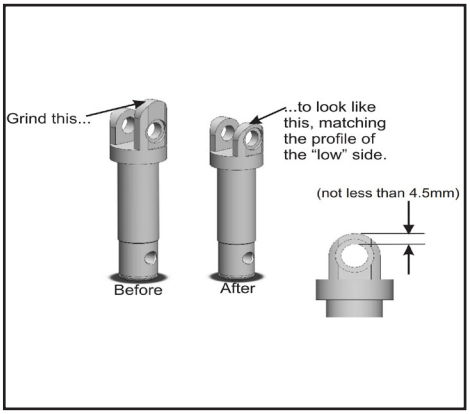


FIGURE 3

LIMITED GUARANTEE

We continually inspect and try to improve our products. All parts have been inspected prior to packaging, and our guarantee is limited to replacement of defective parts. This guarantee is in lieu of all guarantees or warranties implied or expressed. Because we can not control the application of our products, the buyer assumes risks for any and all damage caused by themselves or any third party, by virtue of failure of these parts. We make no warranty as to products distributed by us, expressed or implied, including without limitation, any warranties or merchant ability and fitness for particular purpose. We will, however, pass on all warranties made by the manufacturer, who has sole responsibility for performing such warranties. The manufacturer shall solely be responsible for any damage to person or property arising from design, manufacturing and testing of all products, and we accept no liability for such damages. We shall not be liable for indirect or consequential damages.