BURLY BRAND
MOTORCYCLE ACCESSORIES

INSTALLATION INSTRUCTIONS

FRONT BRUISER KIT


HARLEY DAVIDSON TOURING MODELS

WARNINGS & ALERTS:

- READ AND FOLLOW ALL INSTRUCTIONS FOR PROPER INSTALLATION.
- IMPROPER INSTALLATION CAN CAUSE UNSATISFACTORY AND/OR UNSAFE OPERATION.
- READ ALL THE INSTRUCTIONS CAREFULLY BEFORE INSTALLING THIS KIT ON YOUR MOTORCYCLE. USE YOUR SERVICE MANUAL AS A REFERENCE WHILE INSTALLING THIS KIT.



1. If your bike has a front radiator shroud it must be removed. To remove, turn the wheel all the way to the left and remove shroud by pulling directly forward.
2. Remove your OEM crash guard by removing the two upper socket head bolts and two lower button head bolts attaching to the frame. Keep this hardware for installation of new crash bar.
3. Loosely install the new Burly Brand Bruiser Bar to the frame using the removed hardware. Torque upper socket head bolts to 9 ft-lbs. Torque lower button head bolts to 18 ft-lbs.
4. Install the two sliders to the crash bar using hardware as shown below. Torque bolts to 18 ft-lbs while aligning logo in desired orientation.
5. Reinstall radiator shroud.
6. Enjoy your new Burly Brand Product!

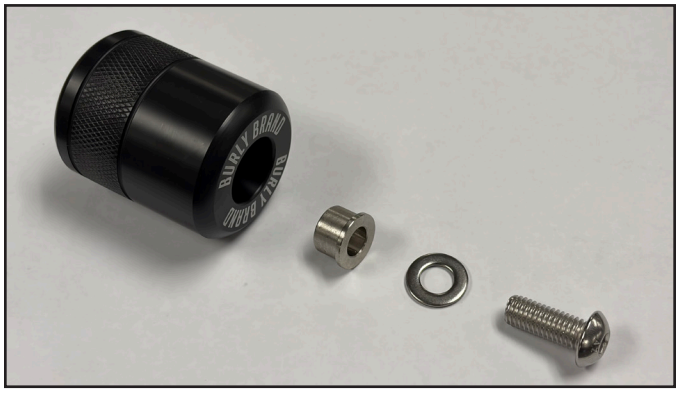

LIMITED GUARANTEE

We continually inspect and try to improve our products. All parts have been inspected prior to packaging, and our guarantee is limited to replacement of defective parts. This guarantee is in lieu of all guarantees or warranties implied or expressed. Because we can not control the application of our products, the buyer assumes risks for any and all damage caused by themselves or any third party, by virtue of failure of these parts. We make no warranty as to products distributed by us, expressed or implied, including without limitation, any warranties or merchant ability and fitness for particular purpose. We will, however, pass on all warranties made by the manufacturer, who has sole responsibility for performing such warranties. The manufacturer shall solely be responsible for any damage to person or property arising from design, manufacturing and testing of all products, and we accept no liability for such damages. We shall not be liable for indirect or consequential damages.